

5 5/8" Integrated Brickmould Awning



These superior quality windows with a decidedly modern flair will meet the most demanding requirements, whether you're looking for durability, energy efficiency, soundproofing or water and air infiltration. Their resistance to sunlight keeps them looking like new season after season.

Awning windows open out from the bottom using an adjustable lever system. In addition, they fit easily into a variety of window arrangements and can be combined with fixed architectural units.

OPTIONS

Frame

- 143 mm (5 5/8")

Sashes

- 30 degrees (#9601)
- Regular (#9601XK)
- Contemporary (#9601XI)

Glass and spacers

- Double glazed
- Triple glazed

Mouldings

- Exterior installation mouldings
- Interior finishing mouldings

Grills

- Integrated

Divided lights

- Simulated divided lights
 - 25 mm (1")
 - 50 mm (2")



Can be painted the color of your choice

TECHNICAL SPECIFICATIONS

Frame

143 mm (5 5/8")
integrated brickmould frame

Structural assembly

- 1 Integrated brick mold
- 2 Nailing fin
- 3 All PVC window with 45° fusion-welded corners
- 4 Profiles with multiple air chambers for optimal thermal insulation
- 5 Triple weatherstripping on sash for maximum air and watertightness
- 6 Integrated 1/2" and 3/4" J-strips on the frame
- 7 Integrated water drainage system
- 8 Coextruded seal

Sash

30 degrees (#9601)
90° opening

Glass

- 9 Energy efficient double glazed glass with 16 mm (5/8") air space



Screen

- 10 White aluminum frame with fiberglass screen


Hardware

Stainless steel LTS mechanism with folding handle


Lock mechanism:
Multi-point

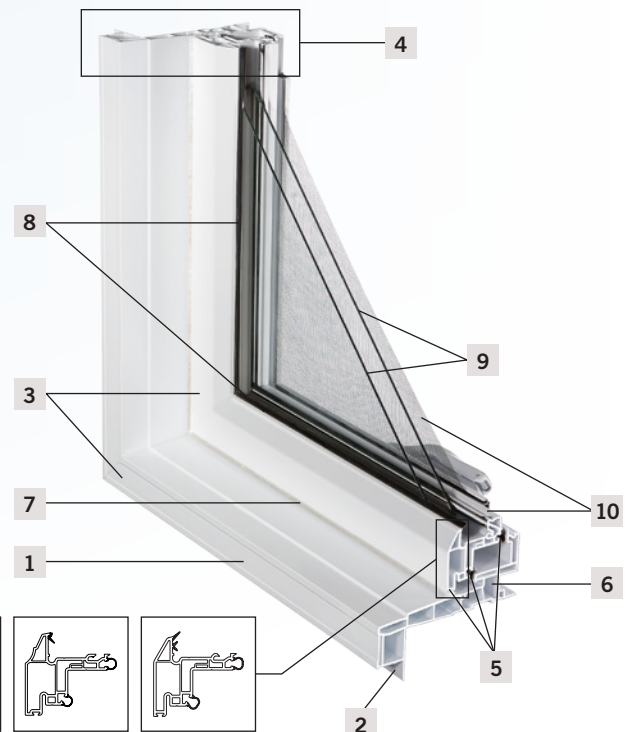

Contemporary
#9601XI



Regular
#9601XK



30 degrees
#9601